Brickcom
BEYOND WHAT YOU SEE

5 Megapixel Day & Night Professional Outdoor Bullet

OB-500Ap V6 SE

H.264 High Profile ● HDTV 1080p/720p ● 5MP/3MP/2MP Resolution Supported



- CMOS 5MP High Resolution Outdoor Bullet Camera
- SmartFocus® to Ease the Zoom and Focus Adjustment Remotely
- HDTV Quality (Full HD 1080p @ 30fps Streaming)
- i-Mode for Different Environments
- Removable IR-cut Filter /Auto Light Sensor for Day and Night
- IK10(*) & IP67 Outdoor Enclosure *excluding the front end glass
- Built-in Fan (-70°C ~ 60°C) and Heater
- Built-in IR Illuminators, Effective up to 60 Meters
- Two-way Audio
- Built-in Micro SD/SDHC/SDXC Memory Card Slot for Local Storage
- P-Iris
- 1 DI/DO for External Alarm and Sensor Device
- TV out Connector Supported
- PoE(802.3at) / PoE(802.3af)/ DC12V Supported
- Smart IR to Get a Better Illuminated Image


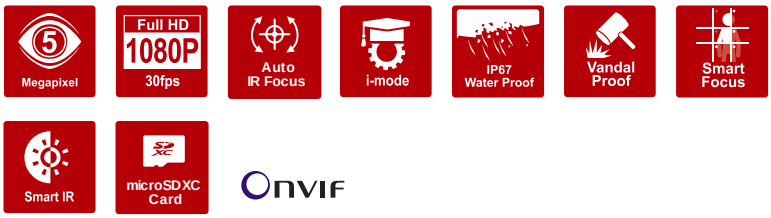


Photo Indication & Dimension Diagram





1. IR LED (20pcs)
2. Lens
3. Light Sensor
4. RJ45 Connector 1 (For Ethernet, 802.3at and 802.3af PoE)
5. Gnd
6. Gnd
7. DC12V
8. DC12V
9. RJ45 Connector 2 (For Audio in/out, RS485, DI/DO)

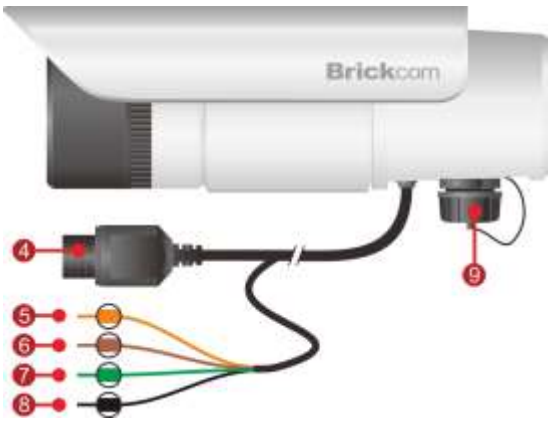



Camera	
Models	**OB-500Ap V6 SE**
Hardware System	Flash: 32MB RAM: 256MB DDR
Image Sensor	Sensor Type : 1/2.5" CMOS Sensor Sensor Resolution : 5MP (2592 x 1944)
Lens	Lens Type: Motorized P-IRIS: F1.4 Focal Length: f=3.3~10.5mm View Angle: (H°/V°/D°) (H)86°~36° /(V)64°~26° /(D) 112°~46°
Local Storage	Built-in Micro SD/SDHC/SDXC Max.128G Memory Card Slot
Day & Night ICR	Triggered by Light sensor, Scheduling, Digital Input
Minimum Illumination	0 Lux(IR On, B/W) 0.01 Lux(B/W) 0.02 Lux(Color)
IR Illuminators	Built –In IR Illuminators, 60m (Visible distance) 25m (Detail distance) IR LED: 20 pcs
Video	
Compression Streaming	H.264 / MPEG4 / MJPEG Simultaneous multiple streams
Video Setting	**i-Mode Scene Management:** Smart Auto/ Indoor 60Hz/ Indoor 50Hz/ Outdoor / Car License Plate / Schedule/ Digital Input / Entrance & Elevator / Always **i-Mode Profile Setting:** Auto Exposure Control/Gain/ White Balance Control Manual Exposure Control: 1/32000~1s Manual Gain Control: 1 ~ 48
Image Resolution	5MP : (2592 x 1944) ● 13fps 3MP : (2048 x 1536) ● 20fps 2MP : (1920 x 1080) ● 30fps
WDR	D-WDR
Events and Alarm Management	
Events	Motion Detection/ Schedule/ Audio Detection/ Digital Input/ Temperature Alarm/ Auto IR Focus for Day & Night
Alarm	Stream/Snapshot to FTP/Email/Samba/SD-Card HTTP/Email Notification/ Digital Output

Audio	
Audio Streaming	2-way Audio Support
Audio Compression	G.711/AMR
Audio Input/ Output	Line input (Unbalanced, 1.4 Vp-p, 1 Vrms) / Line output
General	
Communication	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, HTTPs, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, IPv4, IPv6, 802.1x
Hardware Feature	Communication protocol: RS485
Power Input	DC12V 1A / 802.3af PoE/ 802.3at PoE/
Temperature/ Environment	Operating Temperature: -70°C ~ 60°C (-94°F ~ 140°F) Start-up Temperature: -40°C ~ 60°C (-40°F ~ 140°F) Operating Humidity: 10% ~ 90%
Max. Power Consumption	8.6 Watts (PoE 802.3af, IR on) 8.4 Watts (PoE 802.3at, IR on) 18.2 Watts (PoE 802.3at, IR &Heater &Fan on)
Dimension	70(D) * 166(H) mm
Weight	Net: 1100 g/2.43lb
Housing	Weather-proof (IP67) Vandal-proof (IK10)
Certification	FCC/CE/IK10/IP67/UL/UV & Salt mist test
Viewing System Requirements	OS: Microsoft Windows 8/7/Vista/XP/2000 Browser: Mozilla Firefox, Internet Explorer 6/7 or above, Safari, Google Chrome Cell Phone: 3GPP player Real Player: 10.5 or above Quick Time: 6.6 or above VLC
Warranty	Limited 36 months warranty

Camera Accessories Options



CI-812
Camera Stand

Network Equipment Options



PS-7242IL-AT
24-port 10/ 100M High Power PoE+ Web Smart Ethernet Switch



POE30U V2
High Power PoE Injector 48V

3.3mm-12mm Lens

© 2016 Brickcom Corporation, All rights reserved. This document is for the planning purposes only, and is subject to change without notice.